

FLOS

F3175059 Brass

IC Lights Suspension 1

Designed by Michael Anastassiades, 2014



Halogen - 60W

Suspension lamp providing diffused light. Frame in brass, chrome, red burgundy or black. Blown glass opal diffuser.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	Halogen
Lamp holders	E14
Iicos	HSGS
Number of heads	1
Power (W)	60

Physical

Colour	Brass
Length (mm)	200
Cord length (mm)	2700
Net weight (kg)	1.75
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.05
IP internal	20

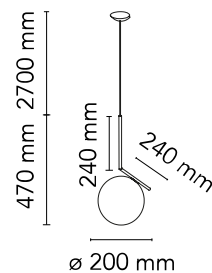

Download

[Mounting instructions](#) PDF

[Spare Parts](#) PDF

Photometric Files

[LDT / IES](#) LDT

Technical Drawings

[2D](#) ZIP


[3D](#) ZIP

[Bim](#) ZIP



	IK 07	IP 20
--	----------	----------

Schematic light drawing



Luminous flux Luminaire
689 lm


Photometric

Lighting type	Total
Light distribution	Asymmetric

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No


Bulbs



NOT INCLUDED

RF32290


LED Lamp E14 8W 2700K T28



NOT INCLUDED

RF32291


LED Lamp E14 8W 3000K T28



NOT INCLUDED

RF32767

LED Lamp 9W E14 220-240V
2700K T28




NOT INCLUDED

RF32768

LED Lamp 9W E14 220-240V
3000K T28

Spare Parts

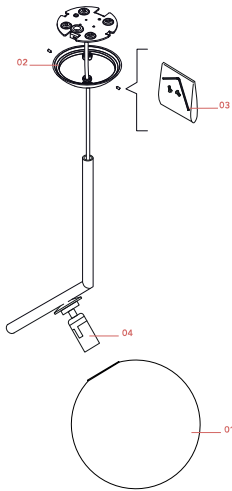

- | | | |
|-----|----------------------------------------|-----------|
| 01. | IC Lights 1 diffuser for brass version | F3136059 |
| 02. | S1/S2 brass ceiling rose assembly | RF3170359 |
| 03. | Kit with screws and allen key | RF3160100 |
| 04. | E14 lamp holder assembly | RF3170100 |

DOWNLOAD



F3136059

IC Lights 1 diffuser for brass version



RF3170359

S1/S2 brass ceiling rose assembly



RF3160100

Kit with screws and allen key



RF3170100

E14 lamp holder assembly